

# 1HS Nozzles



Automatic shut-off nozzle with metal handguard for dispensing up to 25 gpm / 94.6 Lpm.

- 1HS nozzle shuts off when the gas tank is full.
- Accu-Flo® poppet allows “to-the-penny” fuel dispensing.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- Comes standard with full grip guard and waffle splash guard.
- Heavy-duty, long-lasting metal hand guard.



## New Diesel Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
696310N^	with Three Notch Hold Open Clip	3.4 (1.5)
696365N^	with Three Notch Hold Open Clip and Waffle Splash Guard	3.6 (1.6)
696312	without Hold Open Clip	3.4 (1.5)

^ NOT LISTED

## Rebuilt Diesel Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
696610N^	with Three Notch Hold Open Clip	3.4 (1.5)
696665N^	with Three Notch Hold Open Clip and Waffle Splash Guard	3.3 (1.4)
696612	without Hold Open Clip	3.4 (1.5)

^ NOT LISTED


## New Diesel Nozzles with BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
696338N^	with Three Notch Hold Open Clip	3.4 (1.5)
696340	without Hold Open Clip	3.4 (1.5)

^ NOT LISTED

## Construction

Body	Die cast aluminum
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon®
Lever	One piece contoured steel with hard plastic cover
Inlet	1" / 25.4 mm NPT & BSPP

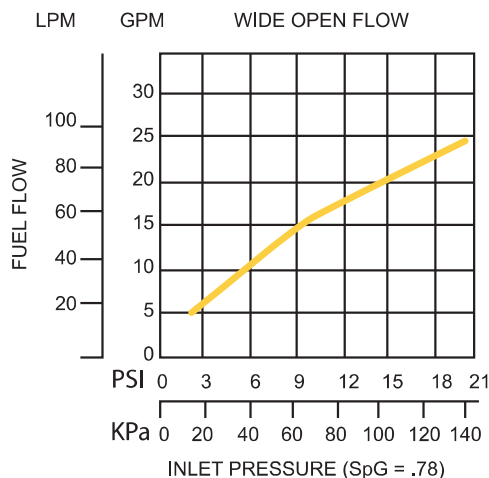

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



# 1HS Nozzles

Automatic shut-off nozzle with metal handguard for dispensing up to 25 gpm / 94.6 Lpm.

## Dimensions and System Options

### Safe-T-Breaks®

MODEL NO.	DESCRIPTION
002276	1" F x 1" F NPT Reconnectable Safe-T-Break®
005812	1" F x 1" F NPT Non-Reconnectable Safe-T-Break®
006301	1" F x 1" F NPT Non-Reconnectable PCC Safe-T-Break®
005231	1" F x 1" F NPT Low Pull Reconnectable Safe-T-Break®
003076	1" F x 1" F BSPP Reconnectable Safe-T-Break®
003076A	1" F x 1" F BSPP Reconnectable Safe-T-Break® - Atex
006914	1" F x 1" F BSPP Non-Reconnectable Safe-T-Break®

### Swivels

MODEL NO.	DESCRIPTION
000087	1" M x 1" F NPT Multi-Plane Swivel
004860	1" M x 1" F NPT Multi-Plane High Flow Swivel
000095	1" M x 1" F NPT 70° Pump Swivel
003395	1" M x 1" F NPT Multi-Plane Restricted Swivel
003306	1" M x 1" F BSPP Multi-Plane Swivel
006949	1" M x 1" F BSPP Multi-Plane High Flow Swivel

### Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
005969	1" M NPT Multi-Plane Swivel connected to 1" F NPT Reconnectable Safe-T-Break®
008015	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break®
008015A	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break® - Atex

### Spouts


MODEL NO.	DESCRIPTION
005215	Heavy Duty Diesel Spout with Flo-Stop®

### Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

### Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
003593	Hold Open Clip Kit
007089	Nozzle Service Kit

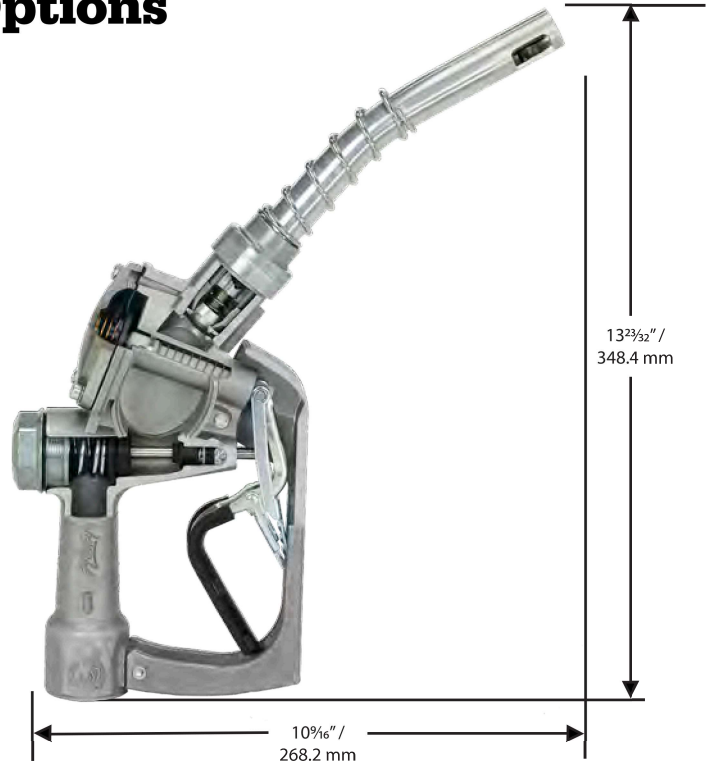

### Guards

MODEL NO.	DESCRIPTION
000554	Full Grip Nozzle Guard
001804	Full Grip Nozzle Reguard
005494	Lever Guard
007295	Mate Handle Cover
000226	Mate Nozzle Guard
008180	POPD® EZH Nozzle Guard
008179	POPD® EZS Nozzle Guard
007999	POPD® H Clear Cover
008183	POPD® H Full Grip Guard
008190	POPD® H Full Grip Reguard
008170	POPD® H Mate Guard
006628	POPD® S Clear Cover
006655	POPD® S Full Grip Guard
007210	POPD® S Full Grip Reguard
008169	POPD® S Mate Guard
000099	Protection Package
001811	Reguard Package
001808	Waffle Splash Guard



2325 Husky Way • Pacific, MO 63069  
 (800) 325-3558 • Fax (636) 825-7300  
[www.husky.com](http://www.husky.com) • [sales@husky.com](mailto:sales@husky.com)

MADE IN THE U.S.A.

# 1HS Nozzles



**Automatic shut-off nozzle with polymer handguard for dispensing up to 25 gpm / 94.6 Lpm.**

- 1HS nozzle shuts off when the gas tank is full.
- Accu-Flo® poppet allows “to-the-penny” fuel dispensing.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- Comes standard with full grip guard and waffle splash guard.



## New Diesel Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
026810N^	with Three Notch Hold Open Clip	3.4 (1.5)
026865N^	with Three Notch Hold Open Clip and Waffle Splash Guard	3.4 (1.5)
026890N^	with Three Notch Hold Open Clip, POPD® Full Grip Guard and Waffle Splash Guard	3.4 (1.5)
026812	without Hold Open Clip	3.4 (1.5)

^ NOT LISTED

## Rebuilt Diesel Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
052410N^	with Three Notch Hold Open Clip	3.4 (1.5)
052412	without Hold Open Clip	3.4 (1.5)

^ NOT LISTED

## New Diesel Nozzles with BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
026838N^	with Three Notch Hold Open Clip	3.4 (1.5)
~026838A	with Three Notch Hold Open Clip	3.4 (1.5)
026840	without Hold Open Clip	3.4 (1.5)

^ NOT LISTED


## Rebuilt Diesel Nozzles with BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
052438N^	with Three Notch Hold Open Clip	3.4 (1.5)

^ NOT LISTED

## Construction

Body	Die cast aluminum body with high impact polymer hand guard
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon®
Lever	One piece contoured steel with hard plastic cover
Inlet	1" / 25.4 mm NPT and BSPP

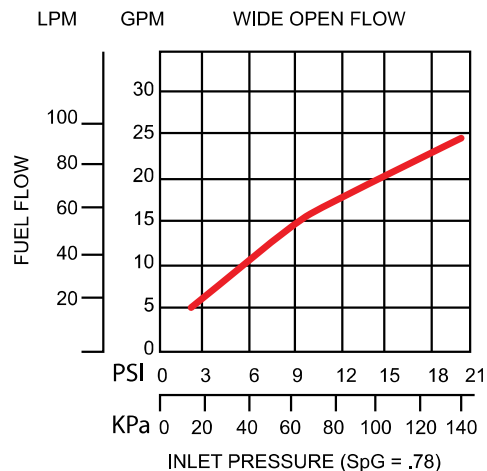

II 1 G  
EN 13012  
TYPE 2

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



# 1HS Nozzles

Automatic shut-off nozzle with polymer handguard for dispensing up to 25 gpm / 94.6 Lpm.

## Dimensions and System Options

### Safe-T-Breaks®

MODEL NO.	DESCRIPTION
002276	1" F x 1" F NPT Reconnectable Safe-T-Break®
005812	1" F x 1" F NPT Non-Reconnectable Safe-T-Break®
006301	1" F x 1" F NPT Non-Reconnectable PCC Safe-T-Break®
005231	1" F x 1" F NPT Low Pull Reconnectable Safe-T-Break®
003076	1" F x 1" F BSPP Reconnectable Safe-T-Break®
003076A	1" F x 1" F BSPP Reconnectable Safe-T-Break® - Atex
006914	1" F x 1" F BSPP Non-Reconnectable Safe-T-Break®

### Swivels

MODEL NO.	DESCRIPTION
000087	1" M x 1" F NPT Multi-Plane Swivel
004860	1" M x 1" F NPT Multi-Plane High Flow Swivel
000095	1" M x 1" F NPT 70° Pump Swivel
003395	1" M x 1" F NPT Multi-Plane Restricted Swivel
003306	1" M x 1" F BSPP Multi-Plane Swivel
006949	1" M x 1" F BSPP Multi-Plane High Flow Swivel

### Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
005969	1" M NPTF Multi-Plane Swivel connected to 1" F NPT Reconnectable Safe-T-Break®
008015	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break®
008015A	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break® - Atex

### Spouts


MODEL NO.	DESCRIPTION
005215	Heavy Duty Diesel Spout with Flo-Stop®

### Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

### Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
003593	Hold Open Clip Kit
007089	Nozzle Service Kit

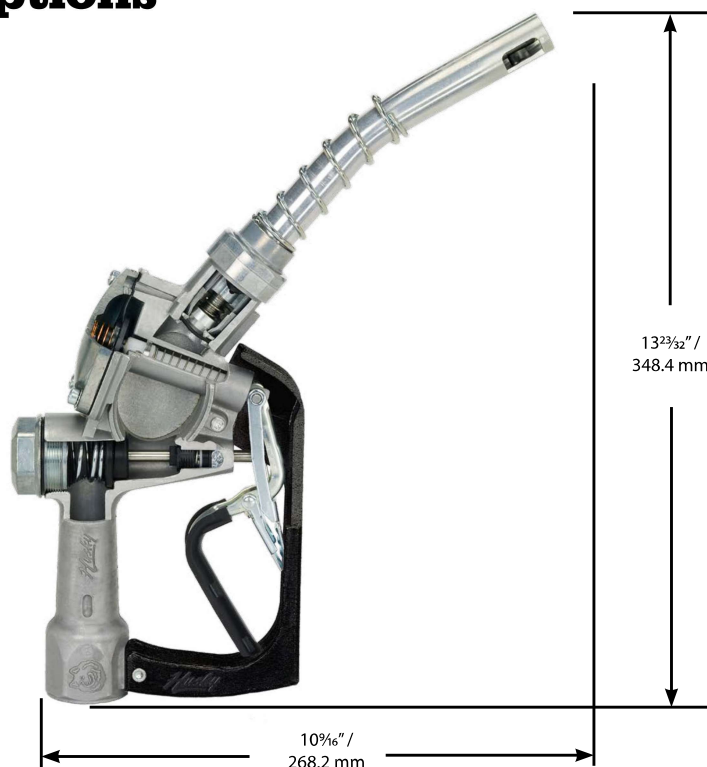

### Guards

MODEL NO.	DESCRIPTION
000554	Full Grip Nozzle Guard
001804	Full Grip Nozzle Reguard
005494	Lever Guard
007376	Mate Handle Cover
000226	Mate Nozzle Guard
008180	POPD® EZH Nozzle Guard
008179	POPD® EZS Nozzle Guard
007999	POPD® H Clear Cover
008183	POPD® H Full Grip Guard
008190	POPD® H Full Grip Reguard
008170	POPD® H Mate Guard
006628	POPD® S Clear Cover
006655	POPD® S Full Grip Guard
007210	POPD® S Full Grip Reguard
008169	POPD® S Mate Guard
000099	Protection Package
001811	Reguard Package
001808	Waffle Splash Guard



2325 Husky Way • Pacific, MO 63069  
 (800) 325-3558 • Fax (636) 825-7300  
[www.husky.com](http://www.husky.com) • [sales@husky.com](mailto:sales@husky.com)

MADE IN THE U.S.A.