

X DEF Nozzle




Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.


- Lighter than stainless steel nozzles.
- Streamshaper® reduces turbulence for straighter fuel flow and less splash back spillage.
- Flow characteristics of nozzle reduces crystallization of DEF.
- Complies with ISO Standard 22241-2:2006.











ISO 9001:2015 CERTIFIED COMPANY



<u>(1</u> v

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

New X DEF Nozzle with 3/4" NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
11676155N	with Three Notch Hold Open Clip	3.0 (1.3)
11676188N	with Three Notch Hold Open Clip, Magnetic Accufuel® Spout	Spout Ring and 3.0 (1.3)
11676189N	with Three Notch Hold Open Clip	and Long Spout 3.0 (1.3)
12150155N	with Three Notch Hold Open Clip Hand Guard	and Gilbarco Magnetic 3.0 (1.3)
12970155N	with Three Notch Hold Open Clip Hand Guard	and Wayne Magnetic 3.0 (1.3)

New X DEF Nozzle with 3/4" BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1167691N	with Three Notch Hold Open Clip, Magnetic Accufuel® Spout	Spout Ring and 3.0 (1.3)
11676154N	with Three Notch Hold Open Clip	3.0 (1.3)
11676180N	with Three Notch Hold Open Clip v Guard	without Waffle 3.0 (1.3)
11676190N	with Three Notch Hold Open Clip a	and Long Spout 3.0 (1.3)
12150154N	with Three Notch Hold Open Clip a Hand Guard	and Gilbarco Magnetic 3.0 (1.3)
1215091N	with Three Notch Hold Open Clip, Accufuel® Spout and Gilbarco Magr	1 5, 5
12964154N	with Two Notch Hold Open Clip, EZ Magnetic Hand Guard without Spor	,
12970154N	with Three Notch Hold Open Clip a Hand Guard	and Wayne Magnetic 3.0 (1.3)
13410204N	with Two Notch Hold Open Clip, Ez Spout Groove	Z Lever, without 3.0 (1.3)

New X DEF Nozzle with M34

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT L	BS (KG)
11676274N	with Three Notch Hold Open Clip	and Long Spout	3.0 (1.3)
12150185N	with Three Notch Hold Open Clip Accufuel® Spout and Gilbarco Ma	, , , , ,	3.0 (1.3)
12150187N	with Three Notch Hold Open Clip Hand Guard		c 3.0 (1.3)
12150259N	without Three Notch Hold Open O Magnetic Hand Guard	• /	3.0 (1.3)
12644155N	with Three Notch Hold Open Clip Hand Guard	, ,	3.0 (1.3)
12970185N	with Three Notch Hold Open Clip Accufuel® Spout and Wayne Magn		3.0 (1.3)
12970259N	without Three Notch Hold Open O Magnetic Hand Guard		3.0 (1.3)

Construction

Body	Anodized Aluminum
Seals	Fluorocarbon o-rings and diaphragm
Spout	19 mm diameter
Lever	One-piece contoured steel with hard plastic cover
Inlet	3/4" / 19 mm NPT Female threads or 3/4" / 19 mm BSPP Face Seal threads M34 1.5 Face Seal threads





Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

Dimensions and System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
012070	3/4" F x 3/4" F NPT Reconnectable Safe-T-Break®
012659	3/4" F x 3/4" F BSPP Reconnectable Safe-T-Break®

Swivel

MODEL NO.	DESCRIPTION
007282	3/4" M BSPP x 3/4" Hose Barb Roller Bearing Inline Swivel
010936	3/4" M BSPP x 3/4" Hose Barb Inline Swivel
012656	3/4" M x 3/4" F BSPP Roller Bearing Inline Swivel
012604	3/4" M x 3/4" F NPT Roller Bearing Inline Swivel

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
007522	3/4" BSPP Seal Kit Assembly
013285	with StreamShaper®
013286	with Spout Ring and Magnetic Accufuel® Safety Feature
015319	with Long Spout and StreamShaper®

Swivel/Safe-T-Break® Combos


MODEL NO.	DESCRIPTION
012828	3/4" BSP M Multi-Plane Swivel connected to 3/4" BSP F Reconnectable Safe-T-Break®
012831	3/4" NPT M Multi-Plane Swivel connected to 3/4" NPT F Reconnectable Safe-T-Break®
012887	3/4" BSP M Multi-Plane Swivel connected to 1" BSP F Reconnectable Safe-T-Break®
012890	3/4" BSP M Multi-Plane Swivel connected to 1" BSP M Reconnectable Safe-T-Break®

Guards

MODEL NO.	DESCRIPTION	
007361	Handle Cover (Black)	
002138	Full Nozzle Guard	
008547	Mate Nozzle Guard	
014114	International Mate Nozzle Guard	
001808	Waffle Splash Guard	

Gilbarco Magnetic Hand Guard



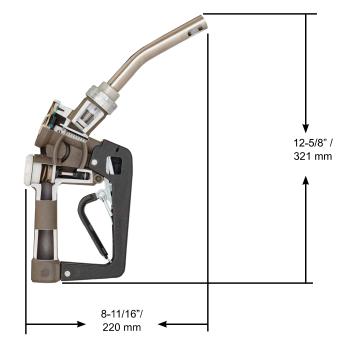





2325 Husky Way • Pacific, MO 63069 (800) 325-3558 • Fax (636) 825-7300 www.husky.com • sales@husky.com

